




The production of a blindstitch seam which is invisible from the outside of the garment, has always been rather problematic. It is imperative for a blindstitch that the needle only picks up enough fabric fibres on the inside of the seam to achieve a secure fastening. Throughstitching as well as skipped stitches must be avoided.

This requires the highest precision in fabric control and in the guidance of the needle by the machine. The most important, and yet the weakest element of a blindstitch machine, is undoubtedly the needle. It should be very thin to avoid damage or puckering on the fabric surface. On the other hand, it should be very stiff

to approach the fabric always in one and the same position. The deflection that may be caused by lateral thread forces or other influences should be next to none in order to avoid malfunction. Those demands are highly contradictory.

THE ADVANTAGES OF THE SQUARE BLADE NEEDLES (V-NEEDLES)

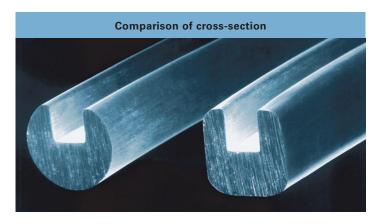

Cross-section of blade

The development of the Groz-Beckert square blade needle (=V-Needle) has created new possibilities to combine needle stability and gentle fabric handling.

The square needle blade offers a rigidity considerably higher as compared to a conventional round blade of equal cross-sectional area.

Loading capacity


A very distinct advantage in needle stiffness becomes evident in a mechanical experiment.


Such features support the needle function during the sewing process. The resistance against bending forces of a V-needle Nm 65 almost reaches the resistance of a conventional size Nm 80 needle. Therefore, in many cases a V-needle size Nm 65 can be used where up to now a needle size Nm 80 was imperative for stability reason. Or, a V-needle size Nm 80, now has the functional rigidity of a regular size Nm 90 needle. The cross-sectionally thinner V-needles require less space during penetration. So, they stretch and displace the textile fibres to a lower degree than round blade needles of comparable stability. Blindstitch seams without distortion on thin and critical cloth become possible.


Needle life and the machine performance are enhanced when standard needles are replaced with V-needles of same size.

V-needles and standard round blade needles in direct comparison:

V-needles of size Nm 65 show an increased resistance against bending forces of 38 % and for needle size Nm 90 even of 60 %.

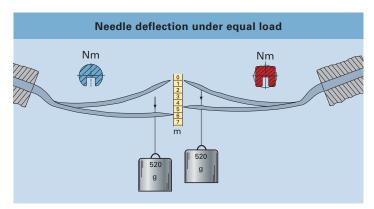


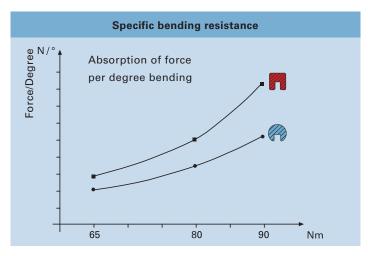

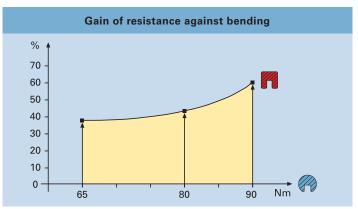


PENETRATION BEHAVIOR

For a proper blindstitch function not only needle stiffness is important but also the precision of the curvature and, hereto closely related, the shape and the position of the needle point. The needle must penetrate the fabric almost parallel to its surface. To enable the needle to split off some fibres, a very acute eccentrical point is required.

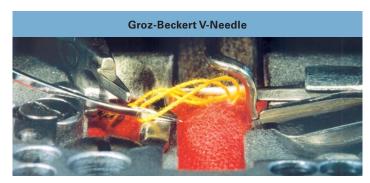

NEEDLE IN POSITION TO PENETRATE.

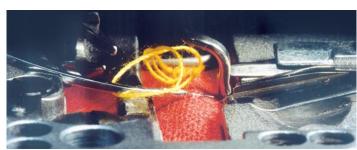

NEEDLE POINT HAS ENTERED FABRIC. SPLIT-OFF FIBRES ARE SHIFTED UP ON THE POINT CONE.




NEEDLE IN LOOP PICK-UP POSITION. THE FIBRES WHICH WERE SEPARATED FROM THE FABRIC BY THE FINE NEEDLE POINT, WRAP AROUND THE NEEDLE BLADE.

Within certain limits blindstitch needles are also produced and offered with ball points. However, such needles cannot be employed to produce a true blindstitch. The mere function of a ball point simply impedes the separation of fibres from the fabric which is imperative in the production of a blindstitch. Consequences like skipping of stitches, or alternatively, throughstitching cannot be avoided with ball point needles.

Nevertheless, this effect is utilized quite often in the confection of knitted apparel, like in the hemming of cuffs on pullovers. Ball point needles are used to produce "throughstitches" deliberately in order to achieve durable and washable seams. The stitches are hardly distinguishable since in such applications they usually fall in line with the loop-line of the fabric.



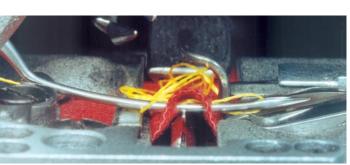

NEEDLE JUST BEFORE PENETRATION. THE BALL POINT HAS IMPEDED THE SEPARATION OF FIBRES FROM THE CLOTH AS IT CAUSED THE NEEDLE TO DEFLECT. A SKIPPED STITCH IS THE CONSEQUENCE.

THE BALL POINT FOUND ITS PATH RIGHT THROUGH THE FABRIC IN A COM-PLETE PENETRATION. THE CONSEQUENCE IS A "TROUGHSTITCH" INSTEAD OF THE INTEN-DED BLINDSTITCH.

V-NEEDLES PRODUCT RANGE:



Standard Needle Classes		V-Needle	Needle profile 1:1	Shank	Needle sizes (Nm)
29 BL 29-34 29-49 2140 TP		29 BLV	401. 201 NC02 RS EM		65 80 90
251 EL 300 GEB 29 BNL 29-C-300 LG	LWx5T	251 ELV	410. 202 NC01 RS EM		65 80 90
251 EU 1669	LWx251 EU	251 EUV	386. 201 NC09 RS EM		65 80 90
251 29 BNS 29-C-300	LWx3T LWx4T	251 V	389. 202 NC01 RS EM		65 80 90
1717 SRUE 1717 TPU 1717 SRU 1717 TPUE 1717 STE		1717 VRUE	360. 201 NC05 RS EM		80 90 110
1669 E EO 1715 E	LWx1669 E	4669 E EO	386. 201 NC06 RS EM		65 80 90
1671 E EO 1671 R 1671 R EO		4671 E EO	424. 201 NC04 RS EM		80

The sewing machine needle is the key element in every blindstitch operation. Groz-Beckert square blade needles have been developed for the latest machine conceptions which place extreme demands on precision, stability and quality

of the needles. The supreme functional features are achieved at the expense of high production and control cost. It pays off in every blindstich machine by higher productivity and in greatly improved seam quality.

GROZ-BECKERT - THAT SUBTLE DIFFERENCE.

GROZ-BECKERT KG

PO Box 10 02 49

72423 Albstadt, Germany

Phone +49 7431 10-0

Fax +49 7431 10-3200 contact@groz-beckert.com www.groz-beckert.com The depictions provided of our products are not to scale and are intended for illustrative purposes only. Consequently they make no claim to be an accurate representation of the original.

® = Registered trademark of the Groz-Beckert company group.
© = This publication is copyrighted. All rights reserved, in particular the right of duplication, distribution and translation. This publication or any parts thereof may not be reproduced or stored, processed, duplicated or distributed using electronic systems in any form or by any means whatsoever without the express written consent of Groz-Beckert.