

<complex-block><complex-block>

Flatbed, interlock stitch machine

W600PCH series Cylinderbed, interlock stitch machine

W500PC, W600PCH / D322, D332 Series





With a machine speed of 4,000 sti/min, intermittent drive (2 sec drive and 2 sec stop)

Built-in Direct Drive Motor

PEGASUS Original Motor

Designed and manufactured by PEGASUS.



(F

CE Marking

Polnt

9

Compliance to standards in EU.

User Friendly


- Quick and Easy Installation.
- Motor Structure
 - Sealed Motor Coil
 - Dust Protection and Heat Prevention.
 - No Coupling

 Direct Transmission and Easy Setup.
- High power, 650W.
- You simply press the pushbutton while turning the handwheel. Changing the needle stop position is easy. (only on the D332 series)



Polnt 2 **Block oil leakage!**

The needle bar and looper shaft (only for W600PCH series) include a special designed oil seal, exerting dramatic "Oil Barrier" effectiveness, preventing oil leakage and oil splashes. And maintenance is very simple and easy, such as change the oil seal.





W600PCH series

This feature reduces oil stains on sewn products, decreasing the use of stain remover. The W500PC/W600PCH series are reliable sewing machines that create a clean work environment and contributes to global environmental protection.

W500PC/D322,D332 : Flatbed, interlock stitch machine

Polnt B Thread trimmer (Electric/Pneumatic)

Threads are easily cut, by pressing the treadle with the heel on an interlock stitch machine. There is no need for the operator to cut the threads when sewing is completed. This feature greatly enhances operator efficiency and allows for increased production. (only for D332 series)

Top cover thread trimmer



These trimmers simultaneously cut needle, looper and top cover threads. There is no need for manual trimming, even during the sewing process when a top cover thread is used. The resultis a substantial increase in production.

Underthread trimmer




This trimmer cuts needle and looper threads.

Seam	Application	Subclass		No.of threads	Needle space (mm)	Max speed (sti/min)			Standard equipments	Motor		Remarks
						without DDM	D322	D332	/ Accessories	D322	D332	Remarks
12	3(4) (Covering)	W562PC-01G	2	3•4	3.2•4.0	6,000	5,000	6,000	Hemming guide Covering guide		UT	
56			3	4•5	4.8•5.6•6.4							
	Diadiastopo	W562PC-02G	2	3•4	3.2•4.0	- 6,000	5,000	6,000	Binder blacket Tape guide			TK(Option)
78	Binding tape		3	4•5	4.8•5.6•6.4							
910	Attaching elastic lace	W562PC-05C	2	3•4	3.2•4.0•4.8	5,500 (5,000 with MD)	5,000	5,500 (5,000 with MD)	FT	LC	LC	MD.TK(Option)
9.0			3	4•5	5.6•6.4							

W600PCH/D322,D332 : Cylinderbed, interlock stitch machine

Seam	Application	Subclass		No.of threads	Needle space (mm)	Max speed (sti/min)			Standard equipments	Motor		Remarks
						without DDM	D322	D332	/ Accessories	D322	D332	Remarks
12	34 (Covering)	W662PCH-01G	2	3•4	3.2•4.0•4.8	5,500	5,000	5,500	Hemming guide Covering guide		UT	RP(Option)
56			3	4•5	5.6•6.4							
1	Attaching flat nit elastic tubular articles	W662PCH-33A	3	4•5	5.6•6.4	5,000	5,000	5,000	FT.RP	LC	UT.LC	
34	Hemming	W662PCH-35B	2	3•4	4.0•4.8	5,000	5,000	5,000	FT	LC	UT.LC	RP(Option)
			3	4•5	5.6•6.4							

UT: UT2R Electric thread trimmer, UT3R Pneumatic thread trimmer LC: Pneumatic lint collector FT: Fabric edge trimmer MD: Mechanical metering device TK: Tape cutter RP: Rear puller

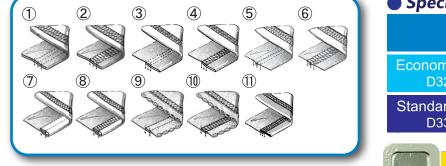

Specification

	Max speed (sti/min)	Output power (W)	Device					
Economy type D322	5,000 *	650	LC					
Standard type	6,000 *	650	UT,LC					

See subclass chart

This Anti-copy (-counterfeit) Sticker certifies that the sewing machine is a genuine product of PEGASUS SEWING MACHINE MFG. CO., LTD. If you look at this sticker through an exclusive "viewer," an original US hidden image will appear.

PEGASUS SEWING MACHINE MFG. CO., LTD.

5-7-2 Sagisu Fukushima-ku, Osaka 553-0002 Japan TEL : +81-6-6458-4739 / FAX : +81-6-6454-8785 http://www.pegasus.co.jp ©2019 PEGASUS SEWING MACHINE MFG. CO., LTD. Catalog No. 103119 Producted January 2021. * The specifications and/or appearances described in this catalog are subject to change without previous notice.

