

技术参数

机 型	机针	针数	线数	针间距 (mm)	针迹宽度 (mm)	针迹长度 (mm)	差动比	压脚高度 (mm)	最高转速 (S.p.m)	体积 (mm)	重量 (kg)
C4-02×250 (包兜机)	14#	2	4	5	5	3.8	0.7-2	3	7000	525*360*510	27.9/35.8
C4-3-02/233 (3线基本型)	11#	1	3	—	4	3.8	0.7-2	5	7000	525*360*510	27.9/35.8
C4WF-3-02/213 (无纺布)	11#	1	3	—	4	8.5	0.7-2	5	7000	525*360*510	27.9/35.8
C4-3-12/233 (下摆缝)	11#	1	3	—	4	3.8	0.7-2	5	7000	525*360*510	27.9/35.8
C4-3-32R2/223 (密拷缝)	9#	1	3	—	1.5	3.8	0.7-2	5	7000	525*360*510	27.9/35.8
C4-3-82/233/P (3线倒回缝)	11#	1	3	—	4	3.8	0.7-2	5	7000	525*360*510	27.9/35.8
C4-4-M03/333 (4线基本型)	11#	1	4	2	4	4.6	0.7-2	5.5	7000	525*360*510	27.9/35.8
C4MJ-4-53/233 (毛巾机)	11#	2	4	2	4	4.2	0.7-2	5	7000	525*360*510	27.9/35.8
C4-4-83/323/P (4线倒回缝)	11#	2	4	2	4	4.2	0.7-2	5.5	7000	525*360*510	27.9/35.8
C4-4-M03/333/H/M (厚料)	11#	2	4	2	4	4.6	0.7-2	6	7000	525*360*510	27.9/35.8
C4-5-53/233 (3×5) (包布条)	14#	2	5	3	4	3.8	0.7-2	5	7000	525*360*510	27.9/35.8
C4-5-03/233 (5×5)	14#	2	5	5	5	3.8	0.7-2	5	7000	525*360*510	27.9/35.8
C4-5-03/333 (3×4)	14#	2	5	3	4	3.8	0.7-2	5	7000	525*360*510	27.9/35.8
C4-5-A04/435 (极厚料)	19#	2	5	5	6	5	0.8-1.5	7	7000	525*360*510	27.9/35.8
C4-6-03/333 (6线)	11#	3	6	3x2	4	3.8	0.7-2	5	7000	525*360*510	27.9/35.8



Jack Wechat



Jack Sewing
Machine Co.,Ltd.

Jack Sewing Machines UK

Web: www.jacksewingmachines.co.uk

Email: info@jacksewingmachines.co.uk



Full automatic overlock machine
with voice guide



C4


C4

Full automatic overlock machine
with voice guide


Automatic voice broadcast solution

please check whether the connecting
line of operation panel and control box
is loose, please try to reset to factory
setting or restart machine.

Presser foot open,
automatic voice alarm

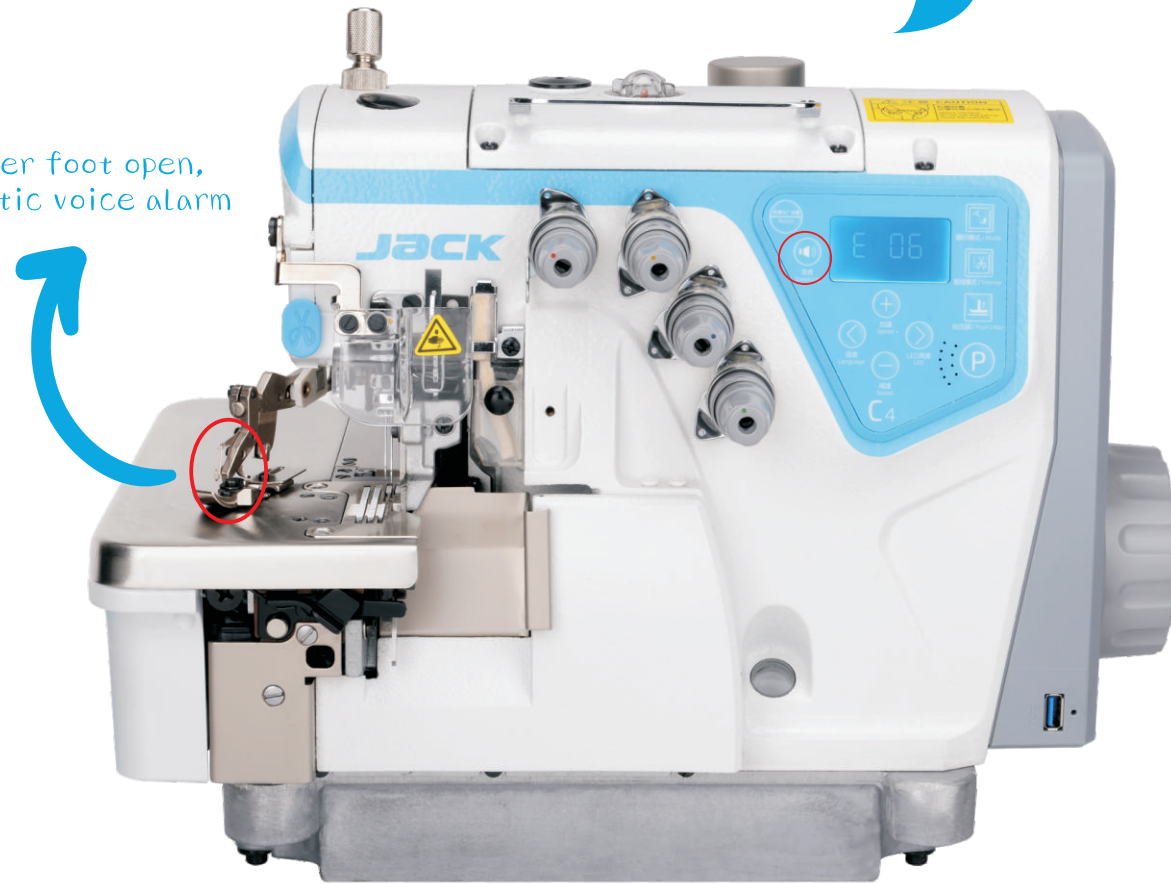

Voice guide, automatic voice alarm and broadcast solution,
easy to operate

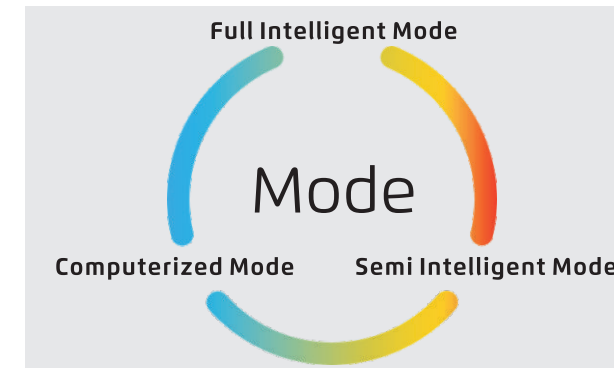

1 Three Operation Model, Easy To Change

Full Intelligent Mode: Machine Works Automatically
Without Foot

Computerized Mode : machine Works With Automatic
Sensor, Automatic Presser Foot Lifter, Automatic
Trimming

Computerized Mode: Machine Works According To
Workers Operation



3 Oil control effectively, high yield

All inclusive needle bar and oil supply system , avoid to oil leakage.





4 One-key reset

Can choose back to user setting or factory setting



2 The highest speed can reach 7000 S.p.m

The efficiency of C4 is 35%-100% faster than normal machine.

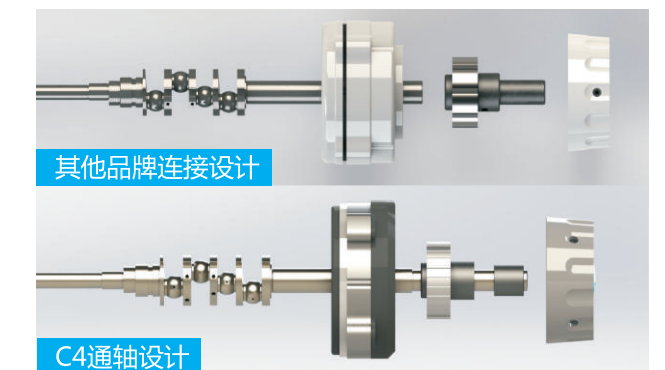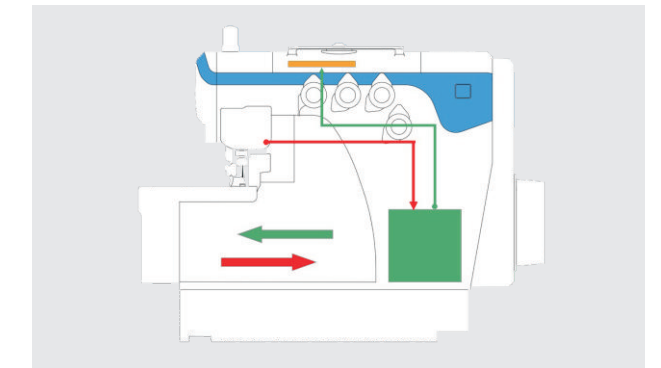

5 Thru-shaft design, stable and durable

Reduce machine torque, machine works more stable